

ApeosPrint C5240

Flagship A4 colour printer

Fast, beautiful, high-volume feeding and finishing



New Times, New Apeos

The new "Apeos" offers advanced features with high security level and easy operability to help business diversify with times.

"Apeos" devices are able to connect smoothly with a variety of solutions and services to realise an all new agile remote workstyle of working anytime, anywhere.



Colour / A4 52 ppm



USB, Ethernet, Wi-Fi* connectivity

*Optional

Superb Printing Quality

- Print resolution up to 1200 x 2400 dpi
- Super EA-Eco toner for fine text and fine lines
- Rich colour expression with LED printhead and IReCT*

* Image Registration Control Technology

Fast output with no wait time

Quick startup and output for greater efficiency

- Print up to 52 ppm on A4 size
- Maximum 3250 sheets paper capacity
- Scalable for high-volume printing needs
- Automatic 2-sided printing
- High-yield toner cartridges
- Machine life up to 600000 pages

ECO support

- Toner save function in increments of 1%
- Super EA-Eco toner: Fusing achieved at a low temperature contributes to low power consumption

Flexible. Secure. Reliable

Offices can easily use different FUJIFILM devices thanks to shared functions across the lineup.

Supports flexible work style

Supports Wireless LAN environment*.

- Being wireless-enabled, device can be installed anywhere in your office
- Up to five Wi-Fi Direct devices can be connected at the same time
- You can easily print from mobile devices using Print Utility, AirPrint, and Mopria® Print Service

* Optional

Print out from any printer within the office

With Server-less On-Demand Print*, you have the flexibility to print and collect the print outs from any of the connected printer.

- Improves productivity by printing from another available device when the current device is in use
- Up to 100 devices can be linked

* Optional

Safeguard Important Information

- Prevents paper information leakage with Secure Print and Private Charge Print with IC card authentication*. With Image Log*, job logs and the image itself can be stored and managed, enabling prompt investigation upon information leakage.
- Newly support WPA3 as latest wireless LAN security protocol and adopt TPM (Trusted Platform Module) 2.0, as a security chip that conforms to the latest standards with enhanced encryption. Detects tampering of device software and self-repairing feature protects and repairs device software against tampering events. Provides more robust and secured office environment with enhanced security feature of both hardware and software.

*Optional

Reliable support system

From consumables replacement to unexpected device failures, most problems can be resolved without waiting for the service or sales representatives.

- Resolve problem using the "Help" function on the device
- "Remote Assistance" with the help of operators



Robust yet compact, ApeosPrint C5240 can be installed just the way you like

Simple layout with easy navigation

Dark-coloured background UI gives better contrast for easy recognition

- Icons are evenly spaced out for easy recognition
- Home screen personalisation for ease of access to commonly used functions
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention




5-inch colour touch panel

Smart & scalable

- 5-inch colour touch panel:**
Intuitive colour touch panel lets you find just what you want at a glance
- USB port*1:**
Use your own USB flash drive to print directly
- Output tray:**
Capacity is 500 sheets
- Bypass Tray (150 sheets):**
Supports various paper types such as envelopes and postcards
- Standard Tray (550 sheets):**
For standard users. Supports various types & sizes of paper
- 550-Sheet Feeder*1 (550 sheets):**
Up to four optional 550-Sheet Feeders can be installed
- High Capacity Feeder*1 (2000 sheets):**
Maximum paper-feeding capacity of 3250 sheets*2 to support high-volume printing needs
- Caster*1:**
For easy installation and moving on the floor
- Cabinet*1:**
Convenient for storing paper and consumables
- IC Card Reader*1:**
You can use Private Charge Print with your IC card

*1: Optional

*2: Standard + 550-Sheet Feeder + High Capacity Feeder

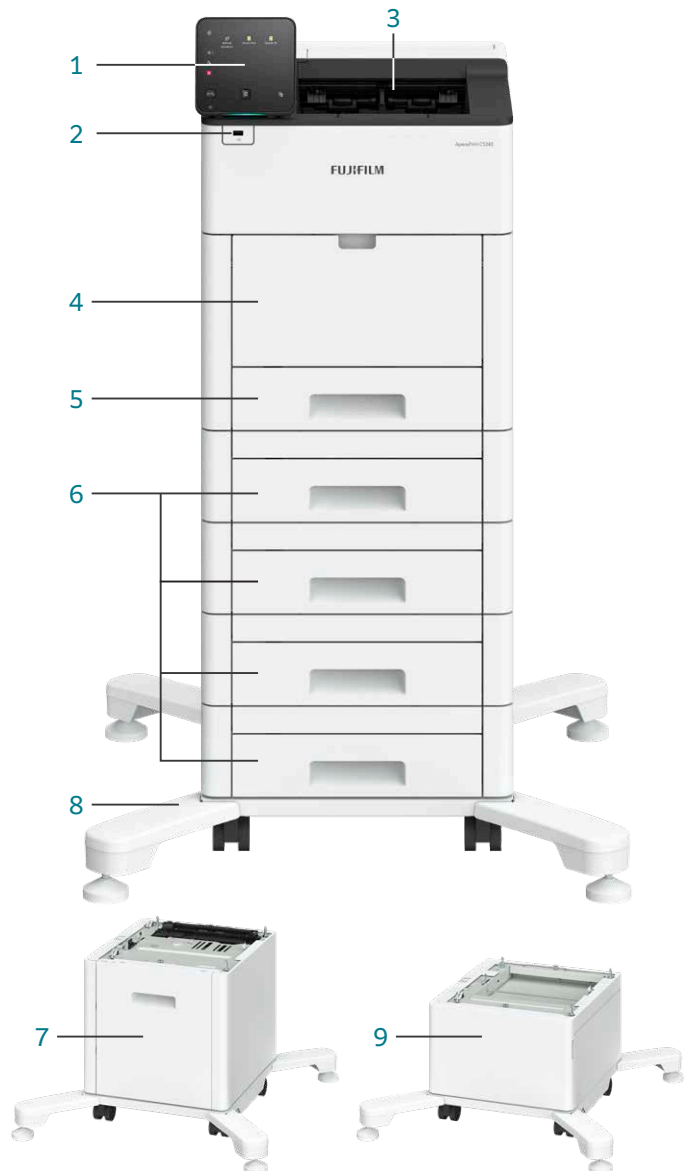

Complete with Finisher-S or Mailbox

Finisher-S, space-saving type

Collates and staples up to 50 sheets

Note: Only Single stapling



4-Bin Mailbox

Easy collates / sorting with each tray supports up to 100 sheets



ApeosPrint C5240 Functions & Specifications

| | | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Items | Description | |
| Type | Desktop | |
| Printing Method | LED Xerography*1 | |
| Warm-up Time | 37 seconds or less (23 degrees Celsius room temperature). 20 seconds or less from Sleep Mode. | |
| Continuous Print Speed*2 | Simplex | Colour: 52.0 ppm, B/W: 52.0 ppm |
| Print Speed*2 | Duplex | Colour: 49.4 ppm, B/W: 49.4 ppm |
| First Print Output Time*3 | Colour: 4.2 seconds (A4), B/W: 4.1 seconds (A4) | |
| Printing Resolution | Standard | [PCL Driver] Standard: 1200 x 2400 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi |
| | Optional | [Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1200 x 2400 dpi, High Resolution: 1200 x 1200 dpi |
| Halftone | 256 levels of colour (16.7 Million colours) | |
| Paper Size | Standard Tray | A5, JIS B5, ISO B5, A4, Statement (139.7 x 215.9 mm), Executive (184 x 267 mm), Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Com-10, Monarch, DL, C5, Custom Size (Width: 76.2 to 215.9 mm, Length: 190.5 to 355.6 mm) |
| | Bypass Tray | A6, JIS B6, A5, JIS B5, ISO B5, A4, Statement (139.7 x 215.9 mm), Executive (184 x 267 mm), Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, COM-10, Monarch, DL, C5, Custom Size (Width: 64 to 215.9 mm, Length: 127.0 to 520 mm) |
| | Optional Tray | 550-Sheet Feeder: A5, JIS B5, A4, Executive (184 x 267 mm), Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Custom Size (Width: 76.2 to 215.9 mm, Length: 190.5 to 355.6 mm) High Capacity Feeder: A4, Letter |
| 2 Sided Printing | A4, JIS B5, A5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal, Executive (184 x 267 mm), Custom Size (Width: 139.7 to 215.9 mm, Length: 203.2 to 355.6 mm) | |
| | Image loss width Lead edge, Trail edge, Right/Left edge: 4.0 mm | |
| Paper Weight*4 | Standard Tray | 60 to 220 gsm |
| | Bypass Tray | 60 to 220 gsm |
| | Optional Tray | 550-Sheet Feeder: 60 to 220 gsm High Capacity Feeder: 60 to 176 gsm |
| | 2 Sided Printing | 60 to 176 gsm |
| Paper Tray Capacity*5 | Standard | Standard Tray: 550 sheets, Bypass Tray: 150 sheets |
| | Optional | 550-Sheet Feeder: 550 sheets High Capacity Feeder: 2000 sheets |
| | Max | 3250 sheets [Standard + 550-Sheet Feeder + High Capacity Feeder] |
| Output Tray Capacity*5 | 500 sheets (Face down) | |
| CPU | ARM Dual Core 1.3 GHz | |
| Memory Capacity | 4 GB (Max: 4 GB) | |
| Storage Device Capacity*6 | 3.6 GB, Optional: 128 GB*7 | |
| Page Description Language | Standard | PCL5 / PCL6 |
| | Optional | Adobe® PostScript® 3™ |
| Supported Operating System*8 | Standard | [PCL Driver] Windows 10 (32 bit / 64 bit) Windows 8.1 (32 bit / 64 bit) Windows Server 2019 (64 bit) Windows Server 2016 (64 bit) Windows Server 2012 R2 (64 bit) Windows Server 2012 (64 bit) [Mac OS X Driver] macOS 11 / 10.15 / 10.14 / 10.13 / 10.12 |
| | Optional | [Adobe® PostScript® 3™ Driver] Windows 10 (32 bit / 64 bit) Windows 8.1 (32 bit / 64 bit) Windows Server 2019 (64 bit) Windows Server 2016 (64 bit) Windows Server 2012 R2 (64 bit) Windows Server 2012 (64 bit) macOS 11 / 10.15 / 10.14 / 10.13 / 10.12 |
| Interface | Standard | Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0, USB2.0 |
| | Optional | Wireless LAN (IEEE 802.11a / b / g / n / ac) |
| Network Protocol | TCP/IP (Ipd, IPP, Port9100) | |
| Power Supply*9 | AC220-240 V +/- 10%, 8 A, 50/60 Hz common | |
| Operating Noise*10*11 | Max | In Operation: 7.2 B, 5.6 dB(A) Ready Mode: 5.8 B, 3.3 dB(A) |
| | Sleep Mode | 0.3 W |
| Maximum Power Consumption | Max | 1270 W (AC220 V +/- 10%), 1410 W (AC240 V +/- 10%) |
| | Average | Ready Mode: 83 W In Operation: 809 W |

| | |
|---------------|------------------------------------------|
| Dimensions*12 | W 427.5 x D 464.5 x H 443.4 mm |
| Weight*13 | 30.2 kg (Including consumables and drum) |
| | 26.1 kg (Excluding consumables and drum) |

- *1: LED + Xerographic.
- *2: When Continuously Printing Original in A4 (Plain). The performance may be reduced depending on the paper type and the paper size. The speed may be reduced due to the image quality adjustment.
- *3: When feeding from feeder tray of machine. Numeric value varies depending on output environment.
- *4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.
- *5: 80 gsm paper.
- *6: The Storage Device Capacity is not totally available for customers.
- *7: When the optional Storage (SSD) is installed.
- *8: Please refer to our official website for the latest supported OS.
- *9: Power outlets that provide the above power level is recommended. Maximum machine measured current: 8 A.
- *10: Measured in accordance to ISO7779. Unit B: Sound Power Level LWAd. Unit dB: Radiated Sound Pressure Level LpAm (bystander position), as reference value.
- *11: Main unit only.
- *12: 550-Sheet Feeder (height): 123 mm (The height increment when the option is installed).
- *13: Including Toner Cartridge. 550-Sheet Feeder: 6.6 kg.

High Capacity Feeder (Optional)

| Item | Description |
|-------------------------------------|---------------------------------------|
| Paper Size | A4, Letter |
| Paper Weight | 60 to 176 gsm |
| Feeding Capacity / Number of Tray*1 | 2000 sheets x 1-tray |
| Dimensions / Weight | W 724.2 x D 772.1 x H 459 mm, 24.0 kg |
| Space Requirement*2 | W 922.1 x D 1322 mm |

- *1: 80 gsm paper.
- *2: Main Unit + High Capacity Feeder; When the Extension Tray / Bypass Tray are fully extended.

Finisher-S (Optional)

| Item | Description |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Type | Sort (Offset available) / Stack (Offset available) |
| Paper Size | A4, JIS B5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal Custom Size: Width: 176.0 to 215.9 mm, Length: 250.0 to 355.6 mm |
| Paper Weight | 60 to 220 gsm |
| Paper Capacity*1 | Finishing Tray [Without Stapling] 500 sheets (80 gsm or less) [With Stapling] 60 sets, or 300 sheets (90 gsm or less) |
| | Output Tray 500 sheets |
| Staple | Capacity 50 sheets (90 gsm or less) |
| | Paper Size*2 Max: A4, Letter; Min: JIS B5 |
| | Paper Weight 60 to 220 gsm Position Single stapling |
| Dimensions / Weight | W 478 x D 451 x H 248 mm, 6.8 kg |
| Space Requirement (When connected to the main unit)*3 | W 870 x D 1322 mm |

- *1: 70 gsm paper.
- *2: Available staple positions vary depending on the paper size.
- *3: Main Unit + Finisher-S; when the paper support is pulled out and the Bypass Tray is fully extended.

Mailbox (Optional)

| Item | Description |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Type | Mailbox 4-bin Sort / Stack |
| Paper Size | Mailbox A4, JIS B5, Letter, 8.5 x 13" (215.9 x 330.2 mm), Legal Custom Size: Width 176.0 to 215.9 mm, Length 250.0 to 355.6 mm |
| Paper Weight | Mailbox 60 to 176 gsm |
| Paper Capacity*1 | Mailbox Each bin 100 sheets Output Tray 400 sheets |
| Dimensions / Weight | W 411 x D 451 x H 248 mm, 5.3 kg |
| Space Requirement*2 | W 870 x D 1322 mm |

- *1: 70 gsm paper.
- *2: Main Unit + Mailbox; when the paper support is pulled out and the Bypass Tray is fully extended.

fujifilm.com/fbau

FUJIFILM

FUJIFILM Business Innovation Australia Pty Ltd

8 Khartoum Road MACQUARIE PARK NSW 2113 Australia
Tel. +61 2 9856 5000

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Apeos, Cloud On-Demand Print is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. •Mopria the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.